





Unit:mm.
Tolerance:
±0.5mm.

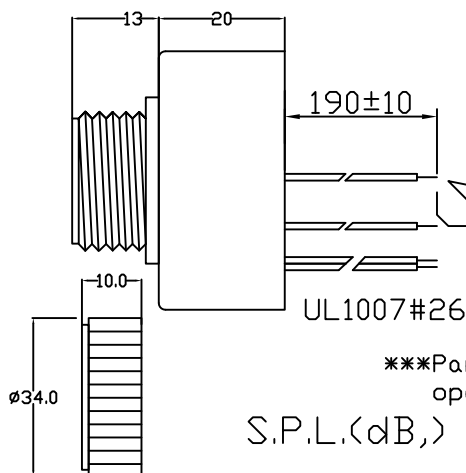

UL1007#26



***Panel mounting(fits 1/8" dia. panel openings up to 1/4" thick)

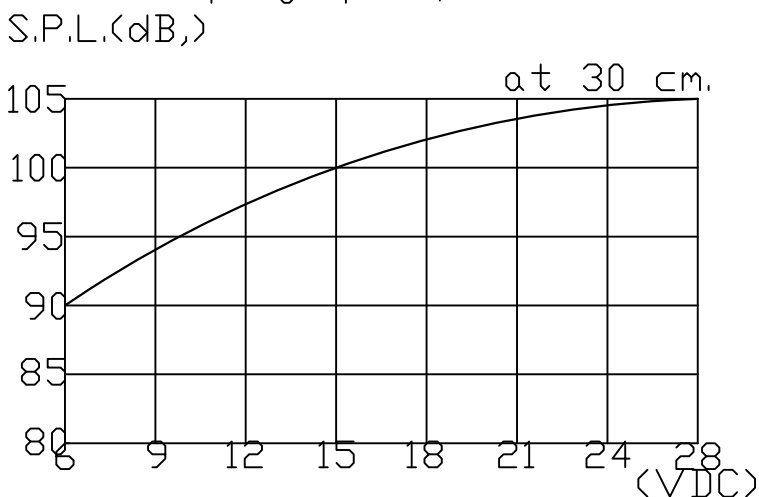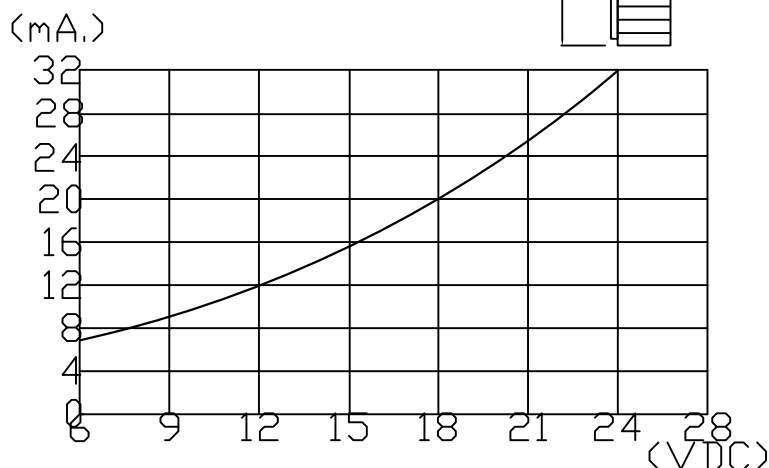

Oscillating Frequency(Hz)	2900±500Hz.
Operating Voltage(VDC)	6~28
Current Consumption at 12VDC (mA.maximum)	12
Sound Pressure Level at 30cm/12VDC(dB.minimum)	95
Tone (FAST PULSE:3Hz, SLOW PULSE:1.2Hz,±20%)	CONT.+FAST PULSE +SLOW PULSE
Operating Temperature(°)	-20~+60
Storage Temperature(°)	-30~+70
Weight (Gram)	36

PIEZO AUDIO INDICATOR		PART NO. 2959AL(RoHS)
DRAWN	2012/6/1	
UNIT:	mm.	
EDITION:	1	
SHEET	1 OF 1	MATERIAL ABS UL-94 1/16" HB
KOYO ELECTRONICS CO.,LTD. Email Add: koyoelectronics@pchome.com.tw		