
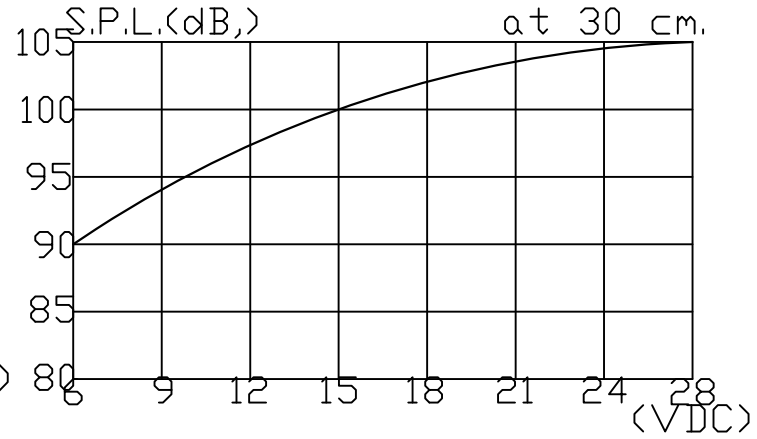


Unit:mm.  
Tolerance:  
±0.5mm.

\*\*\*Panel mounting (fits 1 1/8" dia. panel openings up to 1/4" thick)

(NON-UL)

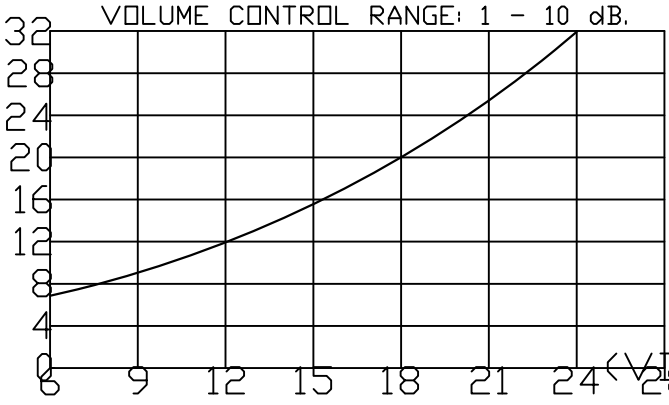

oscillating Frequency(Hz)	2900±500Hz.
operating Voltage(VDC)	6~28
Current Consumption at 12VDC (mA.maximum)	12
Sound Pressure Level at 30cm/12VDC(dB.minimum)	95
Tone (FAST PULSE:3Hz,±20%)	CONT.+FAST PULSE
operating Temperature(°)	-20~+60
Storage Temperature(°)	-30~+70
Weight (Gram)	36

PIEZO AUDIO INDICATOR		PART NO.
DRAWN 2012/6/1		SU2955SA(ROSH)
UNIT: mm.		MATERIAL ABS UL-94 1/16" HB
EDITION: 1		
SHEET 1 OF 1		
KOYO ELECTRONICS CO.,LTD. Email Add: koyoelectronics@pchome.com.tw		