
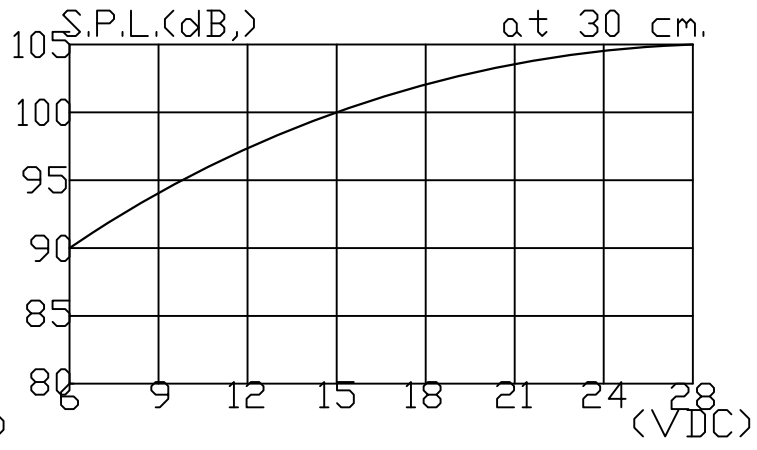


Unit:mm.  
Tolerance:±0.5mm.  
\*\*\*Panel mounting (fits 1/8" dia. panel openings up to 1/4" thick)

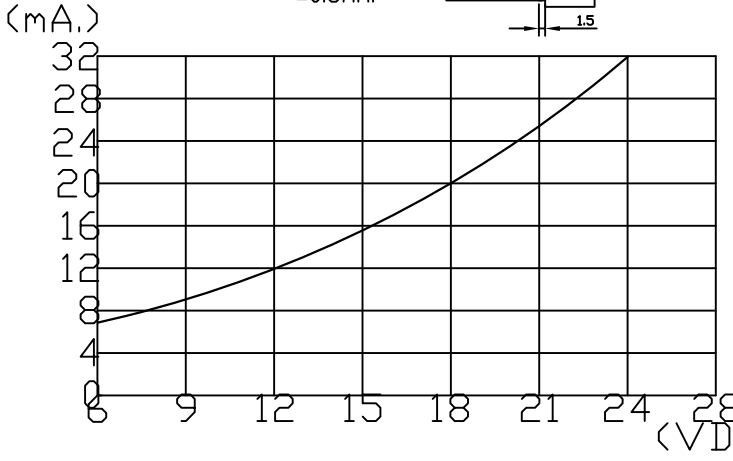

Oscillating Frequency(Hz)	2900±500Hz.
Operating Voltage(VDC)	6~28
Current Consumption at 12VDC (mA.maximum)	12
Sound Pressure Level at 30cm/12VDC(dB.minimum)	95
Tone (FAST PULSE:3Hz, SLOW PULSE:1.2Hz.±20%)	CONT.+FAST PULSE +SLOW PULSE
Operating Temperature(°)	-20~+60
Storage Temperature(°)	-30~+70
Weight (Gram)	40

PIEZO AUDIO INDICATOR		PART NO.
DRAWN	20012/6/1	SU2959A(RoHS)
UNIT:	mm.	
EDITION:	1	MATERIAL
SHEET	1 OF 1	ABS UL-94 1/16" HB
KOYO ELECTRONICS CO.,LTD.		
Email Add.:		
koyoelectronics@pchome.com.tw		